DAILY E6

VAN
35S, 50C & 70C

ENGINES*
Power / Torque 100kW / 350Nm
Power / Torque 132kW / 430Nm
Power / Torque 155kW / 470Nm

TRANSMISSION
8 Speed Auto Transmission
6 Speed Manual (optional)

MASS RATINGS (GVM)
35S 3,800kg
50C 5,200kg
70C 7,000kg

WHEELBASE (mm)
35S 3,520 - 4,100mm
50C 3,520 - 4,100mm
70C 4,100mm

KEY FEATURES

8 Speed Auto Transmission
Steel C section chassis rails
Multiple Options
Suspended Driver's Seat
Adaptive Cruise Control

*For available options & details see the next pages.

MAINTENANCE & REPAIR

ServiceBond – Up to 5 Years / 250,000km
EasyRoad - Up to 5 Years / 250,000km

WARRANTY

Standard Warranty	3 Years / 200,000km
Extended Warranty (Optional)	Up to 5 Years / 350,000km

IVECO
Drive the road of change

Specifications **35S VAN**

Dimensions (mm)

A	Wheelbase	3,520	4,100
B	Overall length	6,087	7,252
C	Front overhang	1,048	1,048
D	Rear overhang	1,519	2,104
E	Overall width (Cab)	2,052	2,052
K	Overall height unladen	2,660	2,663
M	Front track width	1,740	1,740
N	Rear track	1,704	1,704
P	Front Ground Clearance	140	140
Q	Rear Ground Clearance	155	155
	Turning circle kerb to kerb	12,084	13,800
	Turning circle wall to wall	12,744	14,466

Cargo Area (mm)

Volume (m³)	12	16
Internal length	3,540	4,680
Internal width	1,740	1,740
Internal height	1,900 (H2)	1,900 (H2)
Height of loading floor - unladen	682	685
Wheel house distance (int.)	1,317	1,317
Rear door opening width	1,530	1,530
Rear door opening height	1,800	1,800
Side door opening width	1,260	1,260
Side door opening height	1,800	1,800

Mass (kg)

GVM	3,800*	3,800*
GCM	7,300	7,300
Towing capacity with braked trailer	3,500	3,500
Front axle capacity	1,900	1,900
Rear axle capacity	2,430	2,430
Kerb mass front axle	1,372	1,420
Kerb mass rear axle	907	1,013
Kerb mass total**	2,279	2,433
Payload capacity	1,521	1,367

** 3500kg GVM and 6700kg GCM with rear air suspension*

*** Kerb masses are with minimal fuel,spare wheel, tools and no driver*

Front Axle & Suspension

Capacity: 1,900kg

Suspension Type: Double wishbone with transversal leaf spring

Rear Axle & Suspension

Capacity: 2,430kg

Suspension Type: Rear parabolic spring

Optional Suspension: ECAS - Rear air suspension (3.5T GVM)

Capacity: 2,240kg (35S 3.5T GVM)

Rear axle ratio: 3.60: 1

Brakes

Front / Diameter: Disc brakes / 300mm

Rear / Diameter: Disc brakes / 296mm

Parking brake: Electronic

Service brakes: Full ABS disc brakes with floating calipers and auto wear adjustment. Hydraulically operated with vacuum servo assistance. Dual independent cross split circuit configuration. Low Brake fluid level indicator - front & rear pad wear sensors. Asbestos free pads.

Wheels & Tyres

Wheels: Steel 6.5J x R16

- Spare wheel included - in load compartments on some models
- Single rear wheel

Tyre Size: 235/65 R16

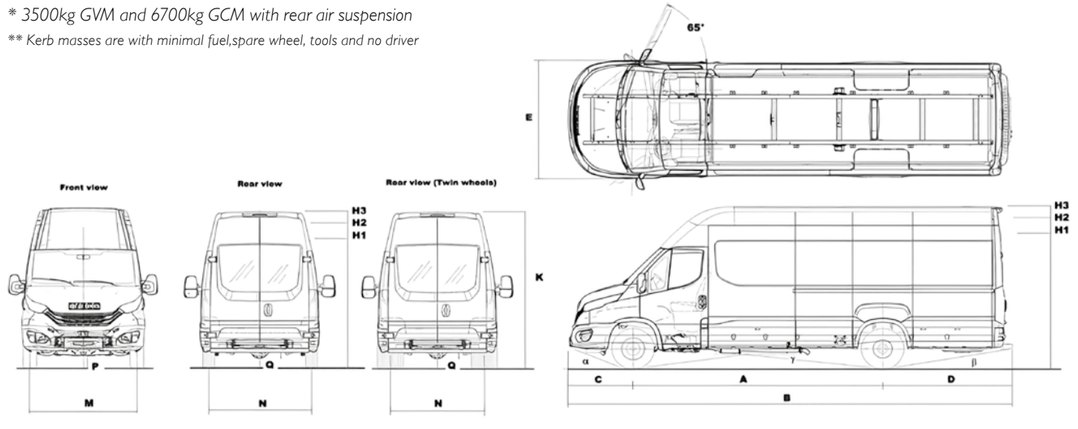

IVECO
Drive the road of change

Specifications **50C VAN**

Dimensions (mm)

A	Wheelbase	3,520	4,100	4,100	4,100
B	Overall length	6,109	7,274	7,274	7,674
C	Front overhang	1,048	1,048	1,048	1,048
D	Rear overhang	1,541	2,126	2,126	2,526
E	Overall width (Cab)	2,052	2,052	2,052	2,052
K	Overall height unladen	2,748	2,752	2,944	2,945
M	Front track width	1,724	1,724	1,724	1,724
N	Rear track	1,542	1,542	1,542	1,542
P	Front Ground Clearance	197	197	197	197
Q	Rear Ground Clearance	162	162	162	162
	Turning circle kerb to kerb	12,744	14,564	14,564	14,564
	Turning circle wall to wall	13,366	15,190	15,190	15,190

Cargo Area (mm)

Volume (m³)	12	16	18	19.6
Internal length	3,540	4,680	4,680	5,125
Internal width	1,740	1,740	1,740	1,740
Internal height	1,900 (H2)	1,900 (H2)	2,100 (H3)	2,100 (H3)
Height of loading floor - unladen	770	774	774	775
Wheel house distance (int.)	1,032	1,032	1,032	1,032
Rear door opening width	1,530	1,530	1,530	1,530
Rear door opening height	1,800	1,800	2,000	2,000
Side door opening width	1,260	1,260	1,260	1,260
Side door opening height	1,800	1,800	1,800	1,800

Mass (kg)

GVM	5,200	5,200	5,200	5,200
GCM	8,700	8,700	8,700	8,700
Towing capacity with braked trailer	3,500	3,500	3,500	3,500
Front axle capacity	2,100	2,100	2,100	2,100
Rear axle capacity	3,700	3,700	3,700	3,700
Kerb mass front axle	1,488	1,512	1,520	1,513
Kerb mass rear axle	1,065	1,177	1,193	1,230
Kerb mass total*	2,553	2,689	2,713	2,743
Payload capacity	1,942	1,806	1,782	1,752

** Kerb masses are with minimal fuel, spare wheel, tools and no driver*

Front Axle & Suspension

Capacity: 2,100kg

Suspension Type: Independent with adjustable steel torsion bar

Rear Axle & Suspension

Capacity: 3,700kg

Suspension Type: Rear parabolic spring

Optional Suspension: ECAS - Rear air suspension

Rear axle ratio: 3.60: 1

Optional Differential: Driver Controlled Differential Lock

Brakes

Front / Diameter: Disc brakes / 290mm

Rear / Diameter: Disc brakes / 290mm

Parking brake: Electronic

Service brakes: Full ABS disc brakes with floating calipers and auto wear adjustment. Hydraulically operated with vacuum servo assistance. Dual independent circuit configuration. Low Brake fluid level indicator - front & rear pad wear sensors. Asbestos free pads.

Wheels & Tyres

Wheels: Steel 5J x R16

- Spare wheel included - in load compartments on some models
- Dual rear wheels

Tyre Size: 195/75 R16

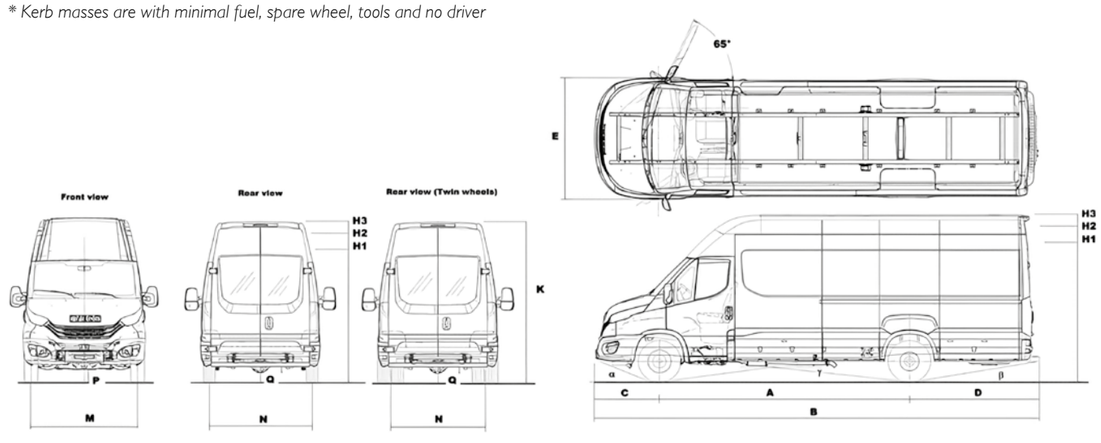

IVECO
Drive the road of change

Specifications **70C VAN**

Dimensions (mm)

A	Wheelbase	4,100 (H3)
B	Overall length	7,664
C	Front overhang	1,048
D	Rear overhang	2,516
E	Overall width (Cab)	2,052
K	Overall height unladen	3,054
M	Front track width	1,725
N	Rear track	1,660
P	Front Ground Clearance	206
Q	Rear Ground Clearance	160
	Turning circle kerb to kerb	14,108
	Turning circle wall to wall	14,758

Cargo Area (mm)

Volume (m^3)	19.6
Internal length	5,125
Internal width	1,740
Internal height	2,100 (H3)
Height of loading floor - unladen	884
Wheel house distance (int.)	1,032
Rear door opening width	1,530
Rear door opening height	2,000
Side door opening width	1,260
Side door opening height	1,800

Mass (kg)

GVM	7,000
GCM	10,500
Towing capacity with braked trailer	3,500
Front axle capacity	2,500
Rear axle capacity	5,350
Kerb mass front axle	1,601
Kerb mass rear axle	1,475
Kerb mass total*	3,076
Payload capacity	3,924

** Kerb masses are with minimal fuel, spare wheel, tools and no driver*

Front Axle & Suspension

Capacity: 2,500kg

Suspension Type: Independent with adjustable steel torsion bar

Rear Axle & Suspension

Capacity: 5,350kg

Suspension Type: Rear parabolic spring

Optional Suspension: ECAS - Rear air suspension

Rear axle ratio: 70C - 4.30: 1

Optional Differential: Driver Controlled Differential Lock

Brakes

Front / Diameter: Disc brakes / 301mm

Rear / Diameter: Disc brakes / 306mm

Parking brake: Electronic / Cable

Service brakes: Full ABS disc brakes with floating calipers and auto wear adjustment. Hydraulically operated with vacuum servo assistance. Dual independent circuit configuration. Low Brake fluid level indicator - front & rear pad wear sensors. Asbestos free pads.

Wheels & Tyres

Wheels: Steel 6J x R16

- Spare wheel included - in load compartments on some models
- Dual rear wheels

Tyre Size: 225/75 R16

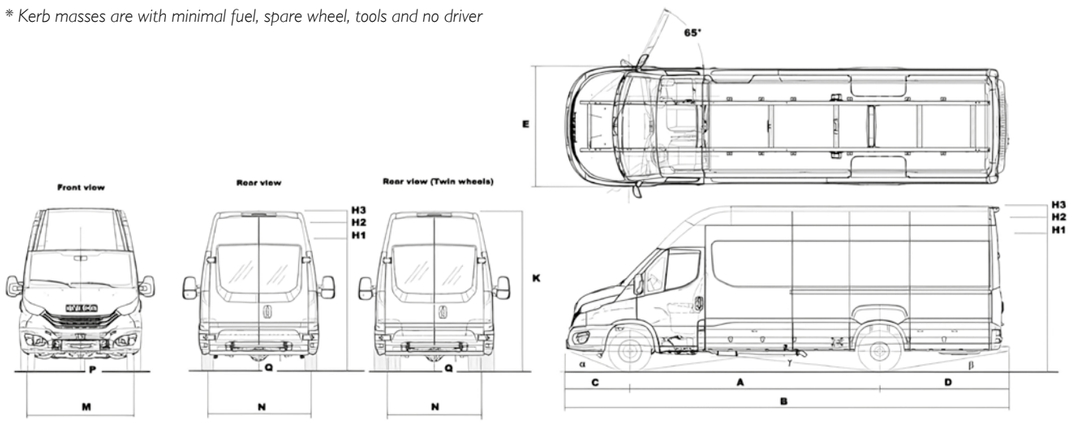

IVECO
Drive the road of change

Specifications

Engine

136EVID F1A Euro 6 Heavy Duty engine (standard on 35S) 4 stroke diesel with direct-injection, intercooler and electronic-controlled variable geometry turbine (e-VGT).

Maximum Output 136EVID: 100kW (136 hp) @ 3600rpm

Maximum Torque 136EVID: 350Nm (258 ft-lbs) @ 1500rpm

180EVID F1C Heavy Duty Euro 6 engine (Standard on 50C & 70C) 4 stroke diesel with direct-injection, Variable Geometry Turbocharger (VGT) and intercooler

Maximum Output: 180EVID: 132kW (180hp) @ 3500rpm

Maximum Torque: 180EVID: 430Nm (317ft-lbs) @ 1500rpm

Optional Engine available on 35S, 50C and 70C: 210EVID - Engine F1C 210 Hp EURO 6 Heavy Duty 4 stroke diesel with direct-injection and electronically-controlled variable geometry turbine (e-VGT)

Maximum Output: 210EVID: 155kW (210 hp) @ 3,500

Maximum Torque: 210EVID: 470Nm (347 ft-lbs) @ 1,500

Emissions Technology: Exhaust Gas Recirculation and Selective Catalytic Reduction

Total Displacement: F1A: 2.3 litre, F1C: 3.0 litre

Exhaust: Muffler horizontally positioned on the right side and tailpipe located mid-way down right side of vehicle

Transmission

Standard 8-speed ZF Torque Converter Automatic transmission (Hi-Matic)

Type: 8V470A - 1st 4.696, 2nd 3.130, 3rd 2.104, 4th 1.667, 5th 1.285, 6th 1.000, 7th 0.839 OD, 8th 0.667 DOD, Rev. 3.297

Optional Transmission: 6-speed Synchromesh Manual

Type: 2840.6 OD (180 hp)1st 5.375, 2nd 3.154, 3rd 2.041, 4th 1.365, 5th 1.000, 6th 0.791 OD, Rev.4.838

Optional Transmission: 6-speed Synchromesh Double Overdrive Manual

Type: 2835.6 DOD (136 hp)
1st 5.004, 2nd 2.635, 3rd 1.503, 4th 1.000, 5th 0.812 OD, 6th 0.685 DOD, Rev. 4.189

Steering

Type: Electric Power Steering (EPS)

Diameter: 380mm diameter steering wheel with telescopic and tilt adjustment

Clutch

Type: Single dry plate hydraulic control

Diameter: 267mm (136 hp); 280mm (180hp)

Fuel System

100 litres with fuel cap location on passenger side (70 litres on 7.3m3)

20 litre Adblue

Electrical System

Type: 12V

Battery: 12V–110Ah (Smart-charging)

Smart Alternator: 12V–220A

Trailer: Wiring to rear of chassis

Chassis

Type: C Section steel longitudinal side members and tubular cross members

Cabin Features

- Driver, passenger and curtain airbags with seat belt pretensioners
- Suspended fully adjustable driver seat with armrest
- Bench seat with two occupant capacity, under seat storage and fold down table
- Adaptive cruise control
- Electric windows
- Exterior mirrors with integrated wide angle and direction indicators, heated and electronically adjustable
- Overhead console with storage shelf
- Large dual storage pockets in doors
- Document storage compartment
- Body builder connections
- 2 cup and 2x bottle holders
- Air conditioning
- Ecoswitch Pro
- 2 spotlights
- 4 loud speakers
- Automatic wipers and headlight control

IVECO
Drive the road of change

Specifications

Safety
- **ESP9** - Includes: ABS (Antilock Braking System), EBD (Electronic Brake force Distribution), ASR (Anti Slip Regulator), MSR (Motor Drag torque control) Hill Holder (Assisted uphill departure), HBA (Hydraulic Brake Assist), LAC (Load Adaptive Control), TSM (Trailer sway mitigation), RMI (Roll Movement Intervention), & ROM (Roll Over Mitigation)
- Four SRS airbags
- Advanced Emergency Braking System (AEBS)
- Reverse Camera
- Traction Plus and Hill Descent

Lights
- Daytime running lights
- Full L.E.D Headlights
- Fog lights

Dashboard
- 3.5" high resolution TFT colour display and silver dial rings
- TFT Display Panel includes: digital speedometer, ADAS (Advanced Driver-Assistance Systems) dashboard, ADAS quick menu, TPMS, oil, battery and service information. Navigation and phone multimedia, fuel economy, trip computer, vehicle settings,display settings and diagnostics.
- Engine oil level display
- Hi-Connect Multimedia System - Apple CarPlay, Android Auto, DAB Radio, MP3 player, USB and AUX connectivity, Bluetooth with steering wheel controls
- Instrument light dimmer switch
- Dash-mounted gear lever
- 3 storage areas on top of dash

Security
- Central locking with remote control
- Steering lock
- Engine immobiliser
- Run Lock Function (Only available if Expansion Module option is selected)

Load Area
- Floor – steel ribbed with load lashing rings
- Side access via top hung side sliding door internal step and grab handle
- Rear access by hinged doors with stops at 90° and 270° and grab handle
- Interior lights at side and rear (door operated with individual isolation)
- Full bulkhead with window

Options

35C VAN Options:

12m³ = 3,520WB x 1,900 (H2)	S
16m³ = 4,100WB x 1,900 (H2)	O
F1C 3.0L engine: 180 hp / 430 Nm	O
8-speed Hi-Matic Automatic Transmission	S
ECAS rear air suspension	O
Windows in rear, doors heated and tinted	O
Window on sliding door (passenger side)	O
Dual sliding doors	O
Windowed dual sliding doors	O
Passenger seat: suspended, adjustable with lumbar support	O
Remove bulkhead	O
Rear step	S
Expansion module	O
Run lock function	O
Crosswind Assist	S

O – *Optional*
S – *Standard*

70C VAN Options:

19.6m³ = 4,100LWB x 2,100 (H3)	S
F1C 3.0L engine: 180hp / 430Nm	O
F1C 3.0L engine: 210hp / 470Nm	S
8-speed Hi-Matic Automatic Transmission	S
ECAS rear air suspension	O
Windows in rear, doors heated and tinted	O
Window on sliding door (passenger side)	O
Dual sliding doors	O
Windowed dual sliding doors	O
Passenger seat: suspended, adjustable with lumbar support	O
Remove bulkhead	O
Differential lock	O
Rear step	O
Expansion module	O
Run lock function	O
Crosswind Assist	S

O – *Optional*
S – *Standard*

50C VAN Options:

12m³ = 3,520WB x 1,900 (H2)	S
16m³ = 4,100WB x 1,900 (H2)	O
18m³ = 4,100WB x 2,100 (H3)	O
19.6m³ = 4,100LWB x 2,100 (H3)	O
F1C 3.0L engine: 180hp / 430Nm	S
F1C 3.0L engine: 210hp / 470Nm	O
8-speed Hi-Matic Automatic Transmission	S
ECAS rear air suspension	O
Windows in rear, doors heated and tinted	O
Window on sliding door (passenger side)	O
Dual sliding doors	O
Windowed dual sliding doors	O
Passenger seat: suspended, adjustable with lumbar support	O
Remove bulkhead	O
Differential lock	O
Rear step	S
Expansion module	O
Run lock function	O
5.2 tonnes re-rating	O
Crosswind Assist	S

O – *Optional*
S – *Standard*

Options
- Full L.E.D Headlights
- Open storage with inductive plus USB charge
- Hi-Connect multimedia system with GPS navigation
- Electric handbrake
- Leather covered steering wheel
- Automatic controlled air conditioning
- Tyre Pressure Monitoring System (TPMS)
- City brake - Not available with manual transmission
- Queue assist
- Automatic high beam control
- Lane departure warning system + Proactive lane keep assist

IVECO

Drive the road of change

VERSION: 12 VERSION DATE: 03/2024

IVECO TRUCKS AUSTRALIA LIMITED TRADING AS IVECO TRUCKS NEW ZEALAND, 1 JERRY GREEN ST, WIRI, AUCKLAND 2104. TELEPHONE 0800 367 483. WWW.IVECO.CO.NZ

THE INFORMATION IN THIS DOCUMENT WAS CORRECT AT THE TIME OF PRINTING. THE DATA IN THIS DOCUMENT IS APPROXIMATE. IF AN EXACT WEIGHT OR DIMENSION IS REQUIRED PLEASE CONTACT IVECO TRUCKS NEW ZEALAND. ALWAYS CONSULT IVECO TRUCKS NEW ZEALAND FOR THE LATEST INFORMATION ON THE VEHICLE BEFORE DECIDING TO PLACE AN ORDER.

OVERSEAS IMAGES ARE SHOWN THROUGHOUT THIS DOCUMENT AND IMAGES MAY REFER TO EQUIPMENT THAT IS OPTIONAL.
THE MODELS DESCRIBED CAN BE SUBJECT TO MODIFICATIONS WITHOUT ANY NOTICE BY THE MANUFACTURER. IVE3062-VSS. 03/2024.